RFID / Smart Card Authentication System
for Access Control and T&A Management

VIRDI RF/Smart card authentication system has been designed for a wide variety of business applications

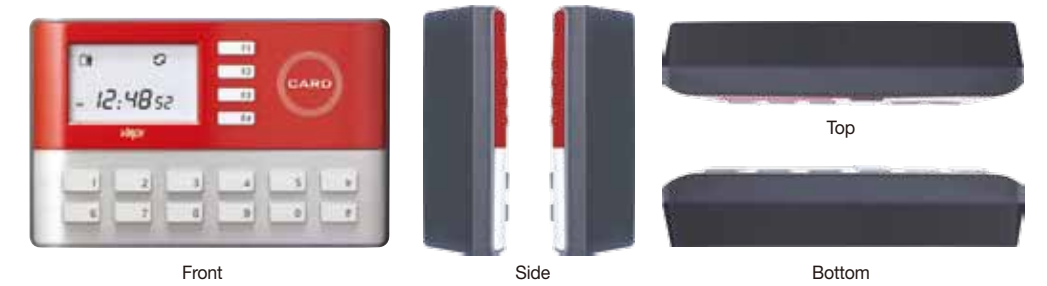**Authentication using RFID or Smart Cards**
- 125KHz or 13.56MHz

Communication interface
- TCP/IP, RS-232, RS-485, Wiegand

Various Authentication Methods
- Using combinations of password and RF/Smart Card

VIRDI **AC 1000**

▶ Image View

Front   Side   Top   Bottom

▶ Key features
· Good Design Award
· User Capacity 4,750
· Log Capacity 8,100
· Card Reader Option: 125KHz EM, 13.56MHz Mifare
· TCP/IP, RS232, RS485, Wiegand

▶ Demo Kit