

# iFace 800

## Upgraded Face Capacity and Performance



With the latest ZK platform and algorithm, iFace800 can hold up to 1,200 faces and 2,000 fingerprint templates. It enables company to manage more employees with less terminals. Optional RFID card ensures that customers have more choices to manage time attendance and access control. It also supports multiple authentication methods including face, fingerprint, password, RFID card and their combinations, which makes iFace800 more applicable. Multi-model communications consisting of RS232/485, TCP/IP, USB host and Wi-Fi/GPRS (optional) allow an extremely easy data management. Optional built-in 2000 mAh battery eliminates the trouble of power failure.

It fulfills your need of managing the time & attendance and access control conveniently.

---


### Feature

- Capacity: 1,200 faces and 2,000 fingerprint templates
- Authentication methods: Face, Fingerprint, RFID and/or Password
- Elegant ergonomic design
- Intuitive touch screen GUI
- Optional built-in backup battery provides approx. 4 hours continuous operation
- Optional Wi-Fi or GPRS for wireless connection
- Built-in interfaces for third party electric lock, door sensor, alarm, exit button, or bell


# Specifications

Fingerprint Sensor	ZK Optical Fingerprint Sensor
Camera	High Resolution Infrared Camera
Display	4.3" TFT Touch Screen
Face Capacity	1,200 (1:N)
Fingerprint Capacity	2,000
ID Card Capacity	10,000 (Optional)
Logs Capacity	100,000
Communication	TCP/IP,RS232/485,USB host (Optional: Wi-Fi/GPRS)
Time Attendance Standard Functions	Photo ID, Automatic Status Switch, Self-Service Query, Work Code, T9 Input, 9 Digit User ID, DST, Scheduled-bell
Access Control Interfaces for	Third Party Electric Lock, Door Sensor and Exit button
Wiegand Signal	Output
Optional Functions	2000 mAh Backup Battery, ID Card, Mifare Card, ADMS
Power Supply	12V 3A
Verification Speed	≤2 sec
Operating Temp.	0- 45 °C
Operating Humidity	20%-80%
Dimension	193.6x165x111 mm (LxWxT)


## Configuration

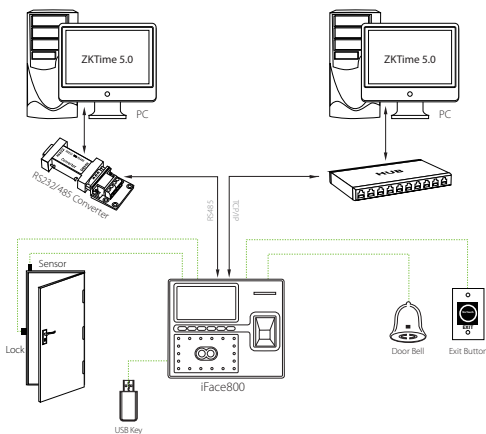


## What's in the Box




iFace800



Back Plate



Power Adapter



Backup Battery (Optional)




Software CD (ZKTime 5.0)



Mounting Paper



Screws and Holders



Star-shape Screw Driver

ZKTeco Inc.  
 ZK Mansion, Wuhe Rd, Gangtuo, Bantian, Buji Town,  
 Longgang District, Shenzhen China 518129  
 Tel: 86-755-8960 2345/46/47/48  
 E-mail: sales@zkteco.com  
 www.zkteco.com

Global Offices:  
 USA: +1 732-412-6007  
 EU: +34 916532891  
 Brazil: +55 31 2515-8326  
 Thailand: +66-027199154  
 Mexico: +52-55-52928418

South Africa: +27 12 259 1047  
 Egypt: +201110444134  
 Dubai: +971 4 6091 310  
 India: +91 8123536788  
 Indonesia: +62 21 2921 8949

Vietnam: +84-0169-5813007  
 Philippines: +63 9084118832  
 Russia: +8 915 178-46-81